

MG815+ Module Hardware Design User Manual

Version: V1.5

ZTE Corporation

This manual is also applicable for ME3000/ME3006/MG615+/MG415+/MG416+ modules.

Copyright Statement

Copyright © 2007 by ZTE Corporation

All rights reserved.

No part of this publication may be excerpted, reproduced, translated or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without the prior written permission of ZTE Corporation.



is the registered trademark of ZTE Corporation. All other trademarks appeared in this manual are owned by the relevant companies.

ZTE Corporation reserves the right to make modifications on print errors or update specifications in this manual without prior notice.

ZTE Corporation keeps the right to make the final explanation to this manual.

With strong technical force, ZTE Corporation can provide CDMA/GPRS module customers with the following all-around technical support:

1. Provide complete technical documentation;
2. Provide the development board used for R&D, test, production, after-sales, etc.;
3. Provide evaluations and technical diagnosis for principle diagram, PCB, test scenarios;
4. Provide test environment;

ZTE Corporation provides customers with onsite supports, and also you could get supports through telephone, website, instant communication, E-mail, etc.

The module website module.ztemt.com.cn provides the relevant industry information and module technical documentation. The authorized module customers could download the latest technical documentation for our website. If you have more requirements, you could send an E-mail to module@zte.com.cn. You can also call us at 0755-86360280 for more supports.

Preface

Summary

This manual is applicable for ME3000/ME3006/MG815+/MG615+/MG415+/MG416+ modules. This manual takes MG815+ and ME3000 as examples to instruct the users how to design the hardware and how to quickly and conveniently design different kinds of wireless terminals based on the modules.

Target Readers

- System designing engineers
- Mechanical engineers
- Hardware engineers
- Software engineers
- Test engineers

Brief Introduction

Chapter	Contents
1 General Description	Introduces technical specs of the modules and relevant documents and abbreviations.
2 Product Introduction to MG815+	Introduces the principle charts and relevant standards of both MG815+ and ME3000 modules.
3 PIN Definitions	Introduces the name and function of PIN.
4 Hardware Interfaces and design reference	Introduces the hardware interface designing of the modules.
5 Mechanical	Introduces the module's appearance, assembly line, main board PCB layout and fixing.
6 Peripherals components	Introduces the peripherals components.

Update History

V1.5 (July-12-2007)

This is the sixth time to release the new version. The update contents include:

Add this manual is also applicable for ME3006

1.1 Technical Specification modification in ME3000's frequency and GSM's Maximum current.

3.1 Modification in RI's description.

4.3 Modification in serial port

V1.4 (June-25-2007)

This is the fifth time to release the new version. The update contents include:

1.1.4 Modifications in Technical parameters

1.2 Modifications in Relevant Documents

4.2 Power and Reset Add ON/OFF timing

5.1 Change the modules weight a more accurate value.

V1.3 (May-31-2007)

This is the fourth time to release the new version. The update contents include:

4.2 Modifications in Section Power and Reset

4.4 Change user ID card interface to SIM/UIM card interface

4.5 Audio Interface: Deleted x05, x06, x07 in the picture, and just kept receiver, handset, and line out.

Change CDMA and GSM audio interface design

4.6 Change RF interface as antenna interface.

5.1 Appearance: Add ME3000's appearance.

5.3 Change PCB Layout.

6 Change Key components as peripherals.

V1.2 (April-24-2007)

This is the third time to release the version. The update contents include:

6.4 Audio Interface

Add Auto power-on/off, audio interface design

V1.1 (April-13-2007)

The update contents include:

5 PIN definitions

Change fig5-1 PIN Diagram

6 Hardware Interface and Reference Design

Change R12 impedance in Fig6-1 as 1K

6.4 Audio Interface

Add the design of audio interface

Add section 6.6 Module Layout

V1.0 (Feb-09-2007)

This is the first to formally release the document.

Table of Contents

1	General Description.....	8
1.1	Technical Specification.....	8
1.1.1	Module Specification.....	8
1.1.2	Main Functions and Features.....	8
1.1.3	Interfaces	9
1.1.4	Technical parameters	9
1.2	Relevant Documents.....	10
1.3	Abbreviations	10
2	Brief Introduction to MG815+	12
2.1	Brief Introduction to MG815+	12
2.2	Brief Introduction to ME3000	12
3	PIN definitions.....	14
4	Hardware Interfaces and Design Reference	18
4.1	Summary.....	18
4.2	Power and Reset	18
4.3	Serial Port	19
4.4	SIM/UIM Card Interface	20
4.5	Audio Interface.....	21
4.6	Antenna Interface	22
5	Mechanical	24
5.1	Appearance	24
5.2	Module Assembly Line.....	24
5.3	Main board PCB layout	25
5.4	Fixing Method	26
6	Peripherals components.....	27

Table of figures

FIGURE 2-1 MG815+ PRINCIPLE.....	12
FIGURE 2-2 ME3000 PRINCIPLE	12
FIGURE 3-1 PIN.....	14
FIGURE 4-1 POWER AND RESET CIRCUIT DESIGN REFERENCE	18
FIGURE 4-2 ON/OFF TIMING.....	19
FIGURE 4-3 UART SIGNAL DIAGRAM	20
FIGURE 4-4 SIM/UIM CARD INTERFACE DESIGN REFERENCE	21
FIGURE 4-5 AUDIO INTERFACE CIRCUIT DESIGN REFERENCE	21
FIGURE 4-6 ANTENNA INTERFACE	23
FIGURE 4-7 RF CABLE INTERFACE.....	23
FIGURE 5-1 MODULE APPEARANCE OF MG815+	24
FIGURE 5-2 MODULE APPEARANCE OF ME3000	24
FIGURE 5-3 MODULE ASSEMBLY LINE (BOTTOM VIEW)	24
FIGURE 5-4 MAIN BOARD PCB LAYOUT (TOP VIEW)	25
FIGURE 5-5 FIXING METHOD.....	26

Tables

TABLE 1-1 MODULE SPECIFICATION	8
TABLE 1-2 MAIN FUNCTIONS AND FEATURES.....	8
TABLE 1-3 INTERFACES OF THE MODULES	9
TABLE 1-4 TECHNICAL PARAMETERS.....	9
TABLE 3-1 PIN DEFINITIONS OF 40 PIN CONNECTOR.....	14
TABLE 3-2 PIN DEFINITIONS OF 10 PIN CONNECTOR.....	17
TABLE 4-1 VOLTAGE FEATURES	18
TABLE 4-2 ON/OFF TIMING FEATURES.....	19
TABLE 4-3 USB AND UART-2 PIN SN AND NAME.....	20
TABLE 6-1 PERIPHERALS COMPONENTS.....	27

1 General Description

This manual is applicable for ME3000/ME3006/MG815+/MG615+/MG415+/MG416+ modules. Except for antenna design, the hardware/mechanical design is completely compatible with the applications of CDMA 800M, Sec800MHz, 450M and GSM/GPRS. All above modules have voice, SMS and data service function, which could be used for data transmission, wireless POS, security, lottery, intelligent metering, wireless fax, small exchangers, tobacco network, campus network, wireless AD, wireless media, medical surveillance, relay station surveillance, railway terminal, intelligent home appliances, vehicle-mounted surveillance, etc. Taking MG815+ and ME3000 module as examples, this manual describes the module's logic structure, hardware interface and main functions, and provides reference design for the hardware and mechanics.

1.1 Technical Specification

1.1.1 Module Specification

Please refer to table 1-1 for the specifications of 5 types of modules ME3000, ME3006, MG815+, MG615+, MG415+ and MG416+.

Table 1-1 module specification

Module Models	Standard	Frequency(MHz)
ME3000	GSM/GPRS	Dual Band: EGSM 900/DCS 1800
ME3006	GSM/GPRS	Quad Band: GSM 850/EGSM 900/DCS 1800/PCS 1900
MG815+	CDMA 2000 1X	800MHz
MG615+	CDMA 2000 1X	Sec800MHz
MG415+	CDMA 2000 1X	450MHz block A
MG416+	CDMA 2000 1X	450MHz block C

Remarks: The modules are compatible on hardware and mechanical design except for frequency. Below is just an example for MG815+ and ME3000 modules.

1.1.2 Main Functions and Features

Please refer to Table 1-2 for the Main Functions and Features.

Table 1-2 Main functions and features

Item	Description	
	CDMA	GSM
Voice	EVRC and 13kQCELP High-quality voice	
SMS	Support TEXT	Support TEXT and PDU
Data	✓ Support internal TCP/IP stack ✓ Support virtual keep on-line(VKL) CDMA maximum up/down link data rate 153.6kbps; GSM maximum up-link data rate 42.8kbps, maximum down-link data rate 85.6kbps.	

1.1.3 Interfaces

Please refer to Table 1-3 for the Interfaces.

Table 1-3 Interfaces of the modules

Item	Description	
	CDMA	GSM
UART interface	Download software to update Data communication Maximum data rate 230.4kbps through the port	
Audio interface	Double audio I/O channel.	
UIM card interface	Built-in UIM/R-UIM	UIM card interface
Antenna interface	50 Ohm input impedance control	
RTC	none	RTC

1.1.4 Technical parameters

Please refer to Table 1-4 for the Technical parameters

Table 1-4 Technical parameters

Item	Description	
	CDMA	GSM
Working temperature	-30°C ~ +75°C	-20°C ~ +80°C
Input voltage	3.3V-4.25V	
Maximum current	560mA @ -104 dBm	1800mA @ -102 dBm
Idle current	5mA @ -75 dBm	10mA @ -75 dBm
Call current	230mA @ -75 dBm	150mA @ -75 dBm
sensitivity	104 dBm	102dBm
Tx power	23dBm ~ 30dBm (Class III)	GSM850,EGSM900:Class4(2W) GSM1800, PCS1900:Class1(1W)
Frequency range	800MHz Tx: 824~849 MHz Rx: 869~894 MHz	GSM850 Tx: 824~849 MHz Rx: 869~894MHz
	Sec800MHz Tx: 806~821 MHz Rx: 851~DL866 MHz	EGSM900 Tx: 880~915 MHz Rx: 925~960MHz
	450MHz A 段 Tx: 450~460 MHz Rx: 460~470 MHz Preferred channel: 160, 210, 260	DCS1800 Tx: 1710~1785MHz Rx 1805~1880MHz
	450MHz C 段 Tx: 450~460 MHz Rx: 460~470 MHz Preferred channel: 47, 97, 147	PCS1900 Tx: 1850~1910MHz Rx: 1930~1990MHz

1.2 Relevant Documents

- 《ZTE Dragon tooth wireless module series product catalog》
- 《AT Command Manual for ZTE Corporation's MG815+ Modules》
- 《AT Command Manual for ZTE Corporation's ME3000 Modules》
- 《ZTE MG815+ Module Development Board User Guide》
- 《FAQ for ZTE Corporation's CDMA Modules》
- 《FAQ for ZTE Corporation's GSM/GPRS Modules》
- 《Test References of ZTE Corporation's CDMA Wireless Modules》

1.3 Abbreviations

Abbr.	Full name
ADC	Analog-Digital Converter
AFC	Automatic Frequency Control
AGC	Automatic Gain Control
ARFCN	Absolute Radio Frequency Channel Number
ARP	Antenna Reference Point
ASIC	Application Specific Integrated Circuit
BER	Bit Error Rate
BTS	Base Transceiver Station
CDMA	Code Division Multiple Access
CDG	CDMA Development Group
CS	Coding Scheme
CSD	Circuit Switched Data
CPU	Central Processing Unit
DAI	Digital Audio interface
DAC	Digital-to-Analog Converter
DCE	Data Communication Equipment
DSP	Digital Signal Processor
DTE	Data Terminal Equipment
DTMF	Dual Tone Multi-Frequency
DTR	Data Terminal Ready
EFR	Enhanced Full Rate
EGSM	Enhanced GSM
EMC	Electromagnetic Compatibility
EMI	Electro Magnetic Interference
ESD	Electronic Static Discharge
ETS	European Telecommunication Standard
FDMA	Frequency Division Multiple Access
FR	Full Rate
GPRS	General Packet Radio Service


GSM	Global Standard for Mobile Communications
HR	Half Rate
IC	Integrated Circuit
IMEI	International Mobile Equipment Identity
ISO	International Standards Organization
ITU	International Telecommunications Union
LCD	Liquid Crystal Display
LED	Light Emitting Diode
MCU	Machine Control Unit
MMI	Man Machine Interface
MS	Mobile Station
PCB	Printed Circuit Board
PCL	Power Control Level
PCS	Personal Communication System
PDU	Protocol Data Unit
PLL	Phase Locked Loop
PPP	Point-to-point protocol
RAM	Random Access Memory
RF	Radio Frequency
ROM	Read-only Memory
RMS	Root Mean Square
RTC	Real Time Clock
SIM	Subscriber Identification Module
SMS	Short Message Service
SRAM	Static Random Access Memory
TA	Terminal adapter
TDMA	Time Division Multiple Access
TE	Terminal Equipment also referred it as DTE
UART	Universal asynchronous receiver-transmitter
UIM	User Identifier Management
USB	Universal Serial Bus
VSWR	Voltage Standing Wave Ratio
ZTE	ZTE Corporation

2 Brief Introduction to MG815+

2.1 Brief Introduction to MG815+

Please refer to Figure 2-1 for the principle of MG815+.


Figure 2-1 MG815+ principle

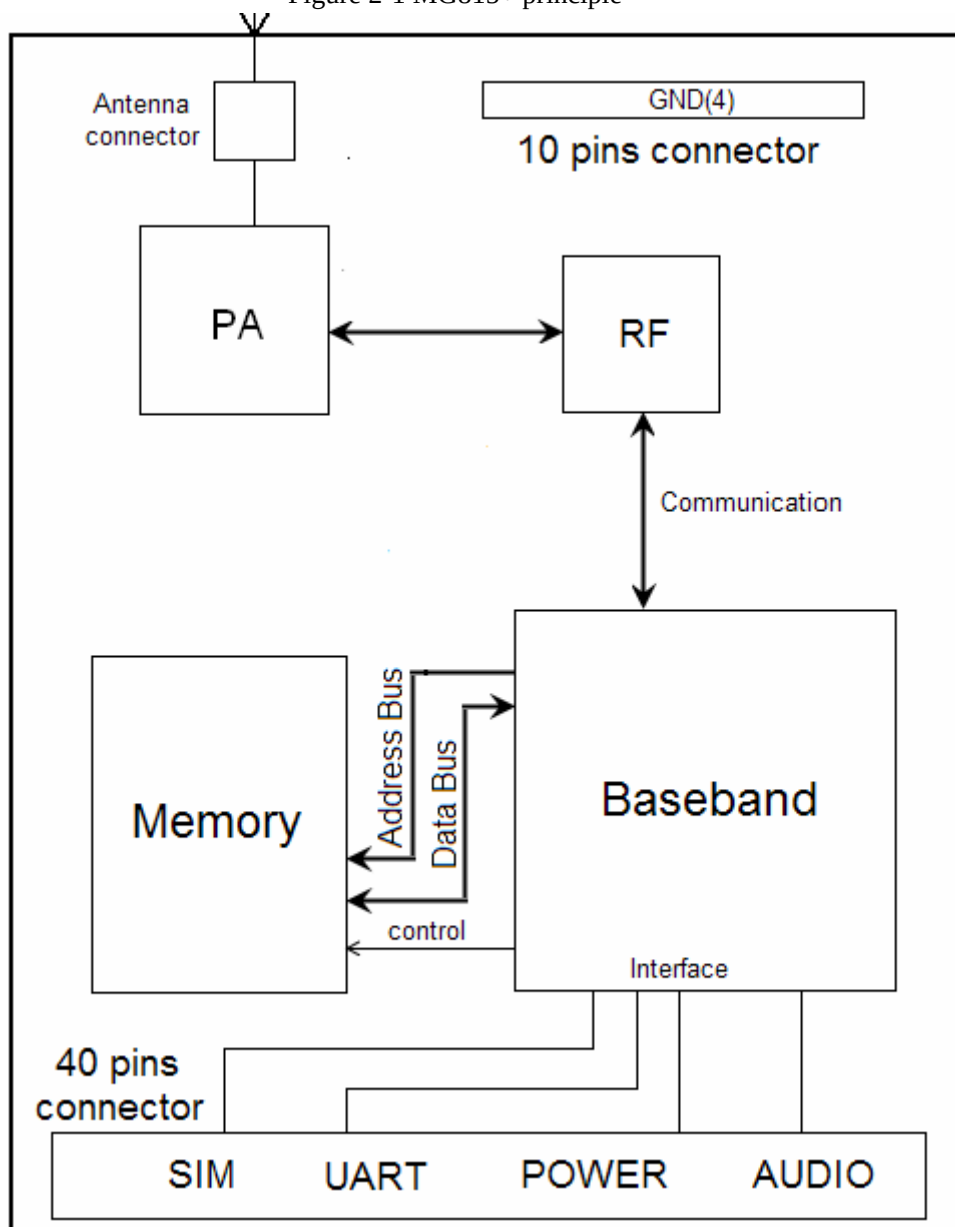

2.2 Brief Introduction to ME3000

Please refer to Figure 2-2 for the principle of ME3000.


Figure 2-2 ME3000 principle

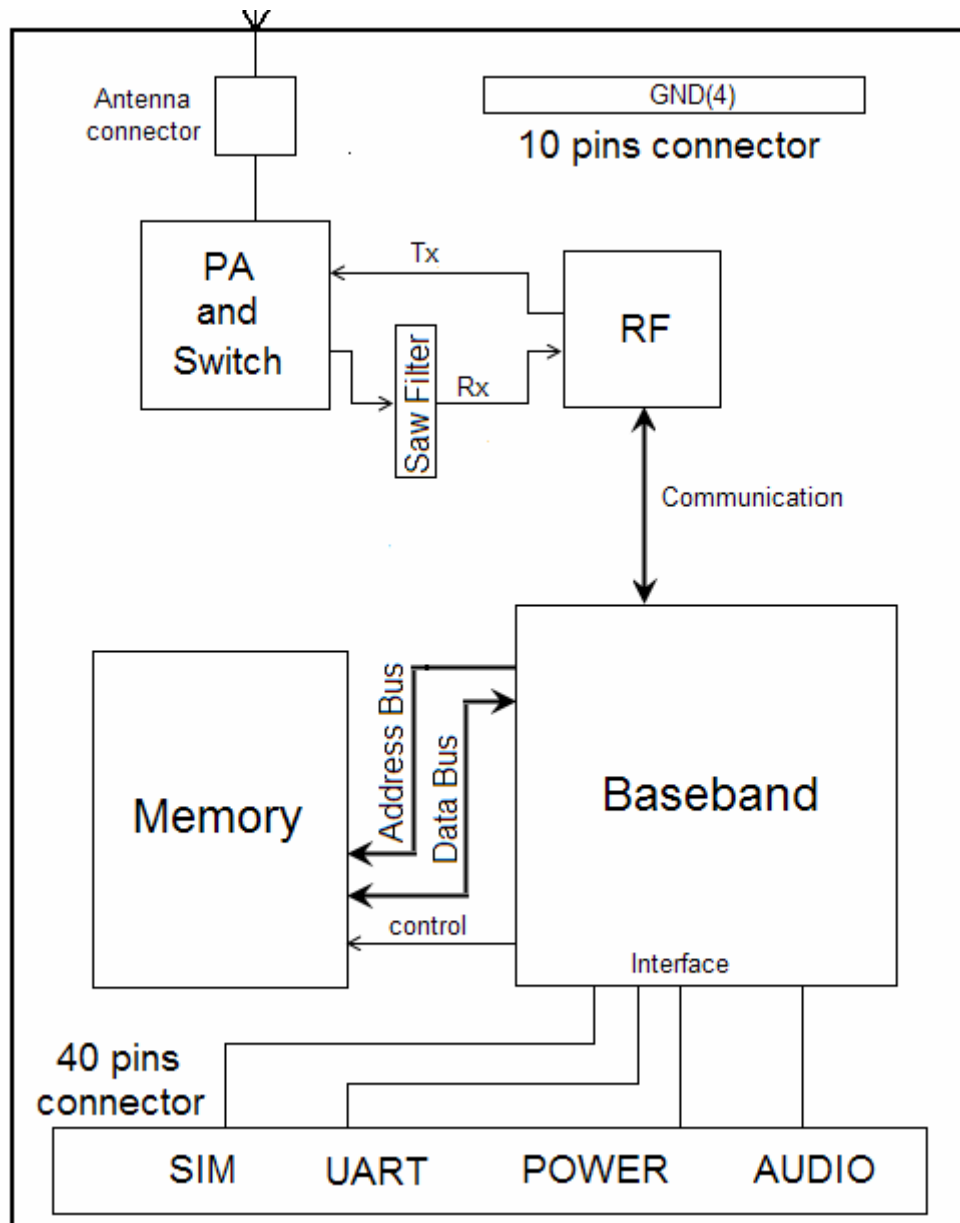

3 PIN definitions

The main connector of MG815+ or ME3000 is 40-PIN connector and 10-PIN connector. The distance between two PINS is 1.27mm. Refer to the figure below:

Figure 3-1 PIN

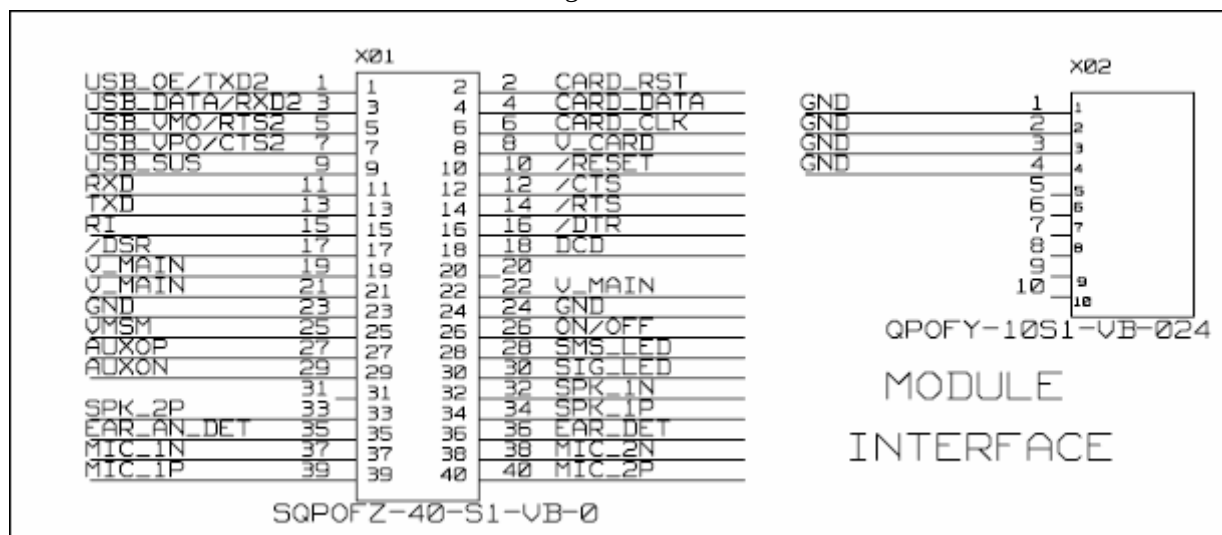

Refer to table 3-1/3-2 below for PIN definitions:

Table 3-1 PIN definitions of 40 PIN connector

Function	Pin No.	Signal name	I/O	Basic functions	Remarks
Audio	39	MIC_1P	I	MIC 1 Anode	MIC 1 is the default configuration for audio I/O when power on, generally MIC 1 is used for handset, MIC 2 for earphone
	37	MIC_1N	I	MIC 1 Cathode	
	34	SPK_1P	O	Receiver 1 Anode	
	32	SPK_1N	O	Receiver 1 Cathode	
	40	MIC_2P	I	MIC 2 Anode	
	38	MIC_2N	I	MIC 2 Cathode	
	33	SPK_2P	O	Receiver 2 Anode	
	35	EAR_AN_DET	I	Earphone button test	draw up internal, low level valid
	36	EAR_DET	I	Earphone inserting test	draw down internal, low level valid
	27	AUXOP	O	Line output, anode	
Serial port 1	29	AUXON	O	Line output, Cathode	
	12	/CTS	O	Clear to send	low level valid.
	14	/RTS	I	Request to send	low level valid
	13	TXD	O	Transmit data	
	11	RXD	I	Receive data	
	15	RI	O	Ring indicating signal	TTL level.High level when initialized:

							--CDMA: producing a periodic signal (100ms low,5.9s high) when received a ring indicating signal; then back to high level when the ring indicating signal is terminated. —GSM: low level during the ring indicating signal, then back to high level when the ring indicating signal is terminated.	
	17	/DSR	O	Module is ready			low level valid	
	18	DCD	O	Carrier signal testing				
	16	/DTR	I	User circuit is ready			low level valid	
UIM card interface	4	CARD_DATA	I/O	Data cable				
	6	CARD_CLK	O	Clock wire				
	8	V_CARD	O	3V power output				
	2	CARD_RST	O	Reset wire				
Serial port 2 or USB interface	PIN number	Signal name	USB	UART	USB	UART	GSM module supports UART but not USB.CDMA module supports both UART and USB, but software should be changed with different interface. Pin 5 and pin 7 are available at low level within UART.	
	1	USB_OE/TXD2	O	O	To USB Transceiver	The same to serial port 1		
	3	USB_DATA/RXD2	I	I	To USB Transceiver			
	5	USB_VMO/RTS2	O	I	To USB Transceiver			
	7	USB_VPO/CTS2	O	O	To USB Transceiver			
	9	USB_SUS	O	NC	Suspend status indicating	suspend		
LED	28	SMS_LED	O	Call/message indicator			Draw down internal, LED will be turned on at high level(with external driver)	
	30	SIG_LED	O	Signal indicator			Draw down internal, LED will be turned on at high level (with external driver). -Turn on: LED off -Searching for network: LED flashes, and it lasts for about 50ms when it is on, and the time is flexible when	

					it is off; -Idle: LED blinks per 100ms. --Traffic (call, data): LED blinks per 500ms
Reset	26	ON/OFF	I	switch control	Draw up internal, Low level valid. For details, please refer to section 4.2 Power and Reset
	10	/RESET	I	Reset signal	Low level valid Need to connect an open collector or an open drain switch. For details, please refer to section 4.2 Power and Reset
power	19	V_MAIN	Power input	Main power of module	
	21	V_MAIN	Power input	Main power of module	
	22	V_MAIN	Power input	Main power of module	
	23	GND		Ground	
	24	GND		Ground	
	25	V_MSM	power output	Digital power	MG815+ module has a voltage output pin with current limited adjuster. It can be used to supply external circuit on main board. the voltage of this pin, baseband processor and storage come from the same voltage adjuster. voltage output is 2.85V when power on. Users should distribute current as little as possible from this pin(less than 10mA). Generally, we suggest this pin is used to pull up chips' pin only when it needs level match.
reserved	20	NC			Used for module inside, need to be suspended
	31	NC			Used for module inside, need to be suspended

Table 3-2 PIN definitions of 10 PIN connector

Function	PIN No.	Signal Name	I/O	Basic functions	Remarks
power	1	GND	GND		
	2	GND	GND		
	3	GND	GND		
	4	GND	GND		
reserved	5	NC			Used for module inside, need to be suspended
	6	NC			
	7	NC			
	8	NC			
	9	NC			
	0	NC			

4 Hardware Interfaces and Design Reference

4.1 Summary


This section describes the function interfaces and usage of MG815+ modules in details, and provides the designing sample.

- Power and Reset Interface
- Serial Port
- SIM/UIM Card Interface
- Audio Interface
- Antenna Interface

Remarks: In the system, the module layout should be far away from high-speed circuit, switch power, power transformer, large power inductor, or single chip microcomputer's clock circuit.

4.2 Power and Reset

Figure 4-1 power and reset circuit design reference

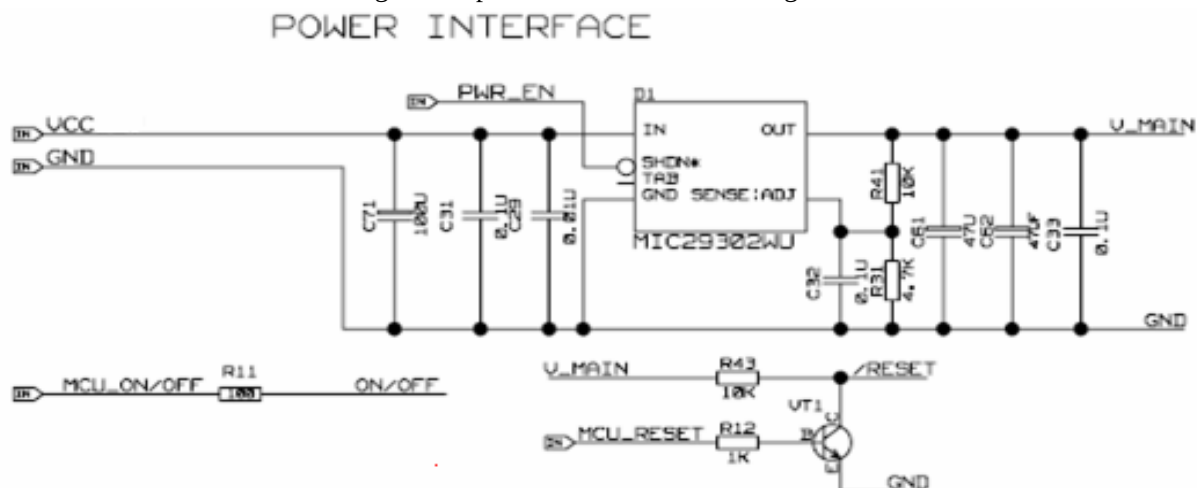

● Power design

The module is powered by V-MAIN, and the voltage feature is below:

Table 4-1 Voltage features

Category	Min.	Typical	Max.
Input voltage	3.3 V	3.9 V	4.25 V

D1 is a LDO with low-valid control, making V_MAIN supplies power to module through adjusting R31and R41 at 3.9V. Modules have very high requirements on power and ground processing, signals must be filtered. Power ripple needs to be controlled under 50Mv. Do not supply power to any other part of system, otherwise RF performance will be compromised. Finally, select the power cables with at least 40mil traces during the layout and keep the integrity of ground line.

● Power ON

The module will be turned off after power-on normally. To turn on the module, firstly put /RESET at high level, and then provide a 1500-2000mS low level pulse to ON/OFF PIN. /Reset needs to connect an open collector or open drain gate.

● Power OFF

To turn off the module, firstly provide a 1500-2000mS low level pulse to ON/OFF PIN, after 5s or 6s, and put /RESET at low level.

● Reset

You could turn off the module firstly and then turn it on to reset the module.

ON/OFF timing figure is as follows:

Figure 4-2 ON/OFF timing

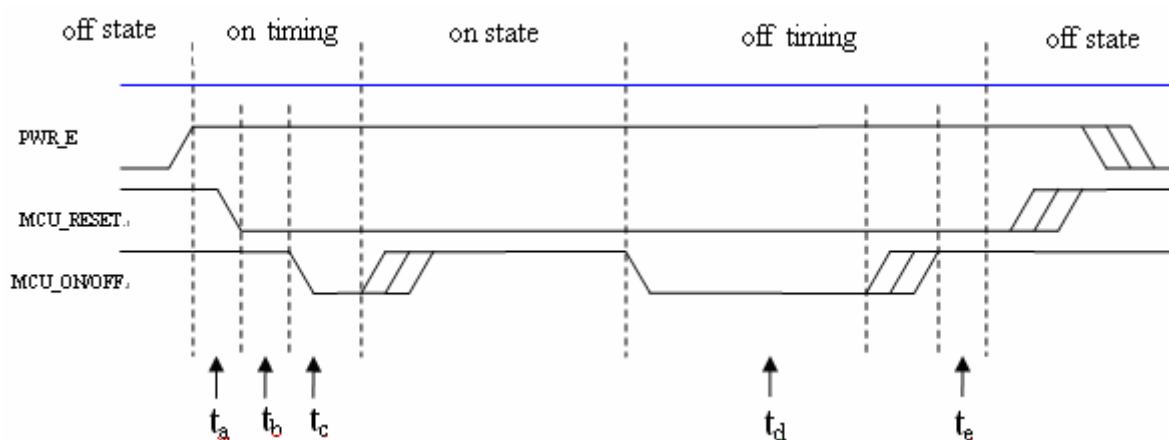


Table 4-2 ON/OFF timing features

t_a	t_b	t_c	t_d	t_e
20mS	10mS	2S	2S	6S

● V_MSM

There is a voltage output pin with current adjuster, which can be used to supply external power to the board. The voltage of this pin and the voltage of baseband processor/memory come from the same voltage adjuster. The voltage output is available only when the module is on. The normal output voltage is 2.85V, and the user should absorb the current from this pin as little as possible (less than 10mA). Generally, it is recommended to use this pin to match the level. When the module is off, the output voltage for this pin remains unchanged, but the impedance is rather high. Therefore, it's not recommended to use this pin for other purposes.

● Other Advice

In order to make sure the data is saved safely, please don't cut off the power when the module is on. It's strongly recommended to add battery or soft switch like the power key on the mobile phone.

4.3 Serial Port

The module provides an integrated full duplex UART interface and an accessorial full duplex UART interface,


whose maximal data rate is 115200bps. External interface is 2.9VCMOS level signal, their logic functions conform to RS-232 interface standard (the definition of RI in CDMA and GSM are different, refer to Table 3-1). These two UART could be used as serial port data interfaces, usually UART1 is used for AT commands, data transmission and updating software of module, UART2 is used to provide test and debug channel.

Note: users need to extend UART1 to update software, if they'd like to connect module to DTE in the design phase.

The module's output IO level is 2.9VTTL, it needs to transfer the level when connect with standard 3.3V or 5V logic circuit (such as MCU or RS232 drive chip MAX3238 etc) , Figure 4-3 shows the serial port level transfer circuit. The converted signal should connect with MCU or RS232 drive chip directly. Common low power switch triode should be applied as the crystal triode shown in Figure 4-3.

Note: when the RxD signal is at high level, the module will not be in dormant state.

Figure 4-3 UART Signal Diagram

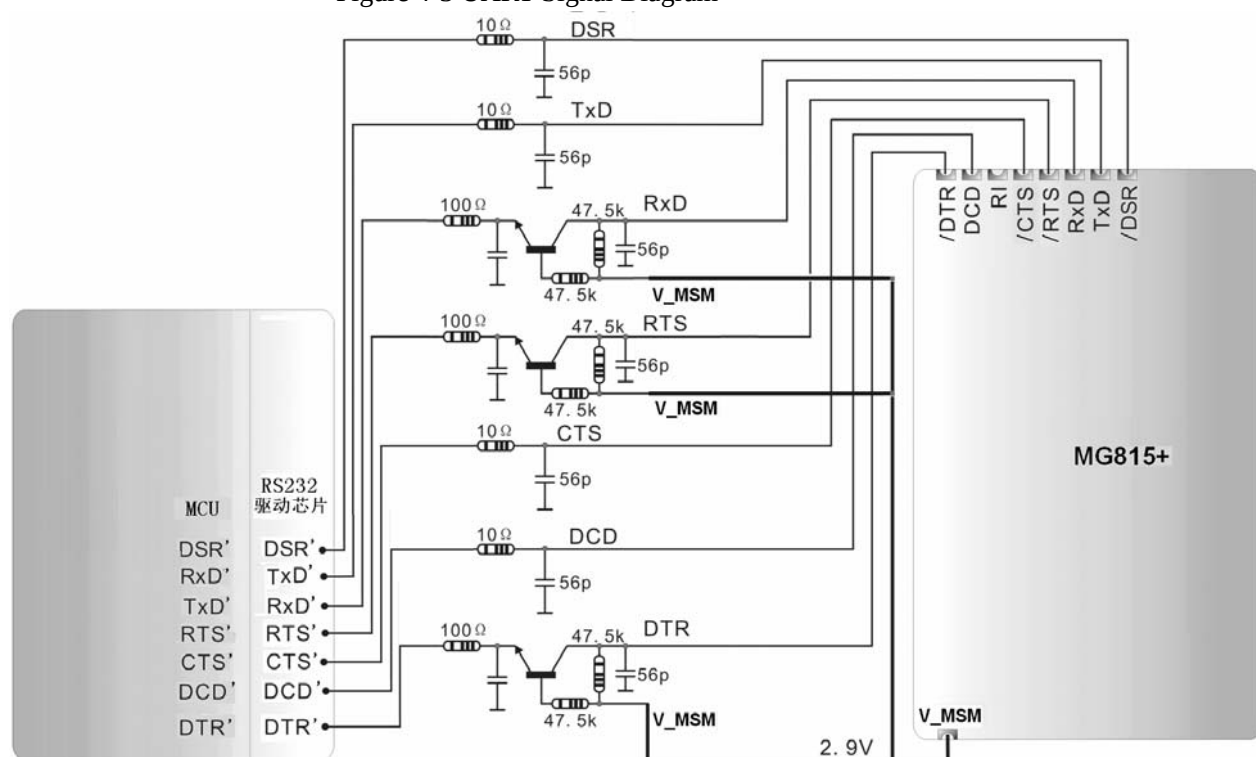

The corresponding PINS of UART 2 are for both UART and USB. GSM modules support UADT (**notes:** not include RTS2 and CTS2) , but not USB; while CDMA modules support USB and UART both. Please refer to table 4-3 for details.


Table 4-3 USB and UART-2 Pin SN and Name

Signal name	UART	USB	pin
USB_OE/TXD2	TXD2	USB_OE	1
USB_DATA/RXD2	RXD2	USB_DATA	3
USB_VMO/ RTS2	RTS2	USB_VMO	5
USB_VPO/ CTS2	CTS2	USB_VPO	7
USB_SUS		USB_SUS	9

4.4 SIM/UIM Card Interface

Modules support 3V SIM/UIM card, SIM/UIM terminal includes 4 pins. V_CARD is used to supply SIM/UIM card. It's strongly recommended to add ESD to protect SIM/UIM card in hostile environments. D2 in the following layout is for ESD:

Figure 4-4 SIM/UIM card interface design reference

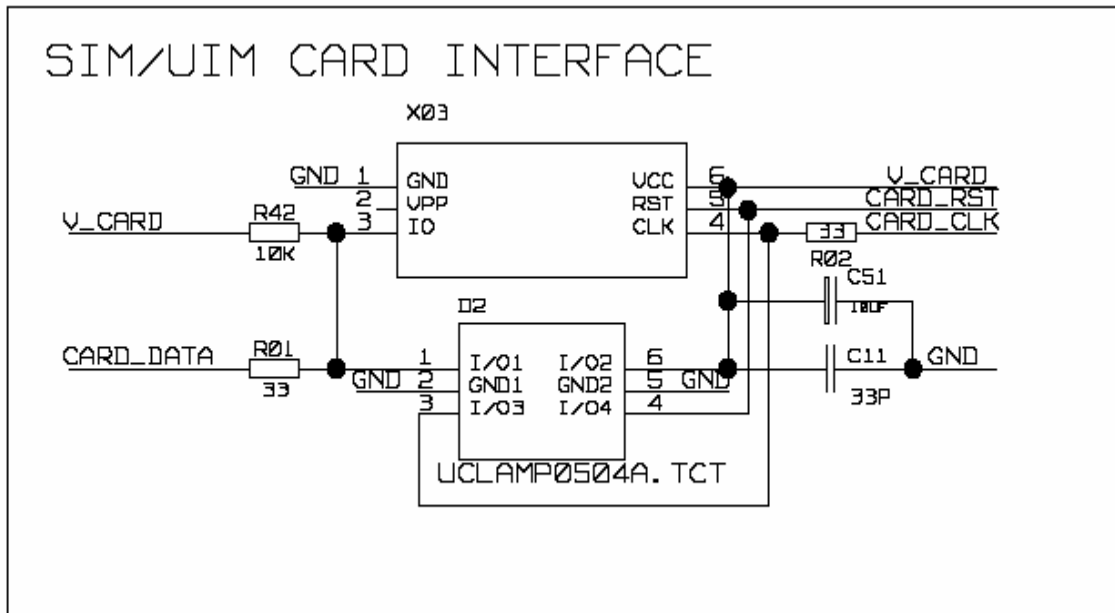


NOTE: A 10k resistor is required for CARD_DATA pin to be draw up to V_CARD pin, because there are different SIM/UIM cards with quite different output currents. SIM/UIM card PCB circuit should be laid closely around the module as possible as you can, to avoid the interference of reading/writing from other sources.

4.5 Audio Interface

The module provides audio input and output through MIC_2P. There are 2 speaker interfaces, 2 microphone interfaces and 1 line output. Only one pair I/O works at the same time.

Figure 4-5 audio interface circuit design reference

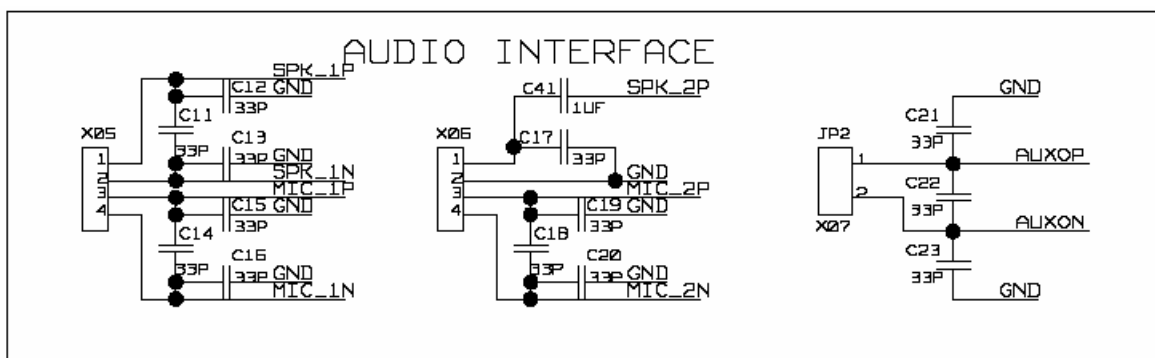

● Microphone

The system connector provides two microphone interfaces MIC_1 and MIC_2, which are both differential interface. They could be also used as single ended input (for example: earphone). It's recommended to use

differential mode to reduce the noises. These two input are coupled in AC domain and added a 1.8V offset voltage inside, and they should directly connect with the receiver.

- **Speaker**

The system connector provides two speakers, SPK_1 & SPK_2. The former is differential interface, and the latter is single-ended interface, usually used for earphone. They both have 32 ohm impedance.

- **Line output**

The MIC_2P connector provides a differential line output via AUXOP and AOXON. The impedance is 8 ohm.

CDMA module audio interface is designed as below:

- **Design of audio interface on the handset**

Select the microphone with the sensitivity lower than -52dB since the output power for SPK_1 is 35mW and the max. gain in MIC_1 reaches 52dB. The level of MIC_1P PIN is about 1.8V.

Note: if other kind of audio input method is adopted, the input signal should be within 2V. If the signal voltage is lower than 2V, then the pre-amplifier should be added. If the signal voltage is higher than 2V, then network attenuation should be added.

- **Design of audio interface on the receiver**

Select the microphone with the sensitivity lower than -52dB since the output power for SPK_2 is 8.8mW and the max. gain in MIC_2 reaches 52dB. The level of MIC_2P PIN is about 1.8V. The receiver's design is just the same as the handset's.

GSM/GPRS module audio interface is designed as below:

- **Design of audio interface on the receiver**

Select the microphone with the sensitivity lower than -51.5dB since the output impedance for SPK_1 is 32 ohm and the max. gain in MIC_1 reaches 51.5dB. The level of MIC_1P PIN is about 2.5V.

Note: if other kind of audio input method is adopted, the input signal should be within 0.5V. If the signal voltage is lower than 0.5V, then the pre-amplifier should be added. If the signal voltage is higher than 0.5V, then network attenuation should be added.

- **Design of audio interface on the earphone**

Select the microphone with the sensitivity lower than -51.5dB since the output impedance for SPK_2 is 32 ohm and the max. gain in MIC_2 reaches 51.5dB. The level of MIC_2P PIN is about 2.5V. The receiver's design is just the same as the handset's.

4.6 Antenna Interface


The module provides two types of RF connector:

- Extended jointing connector
- RF testing socket

PCB jointing connector is used to connect module with antenna by 50 ohm RF shielding cable to cut down the cost. But it's not a complete way to shield EMI, and RF signal quality may be trivially affected. So if you decide to use this method, intense radiation must keep far away from PCB jointing connector. At the same time,

you must ensure that core line of RF shielding cable has been jointed to PCB jointing connector, and the shielding metal wire netting on the RF cable has been jointed to GND of module. According to the figure below, the grounding part must be jointed firmly, otherwise, the core cable may be ruptured caused by shielding cable shaking.

Figure 4-6 Antenna Interface

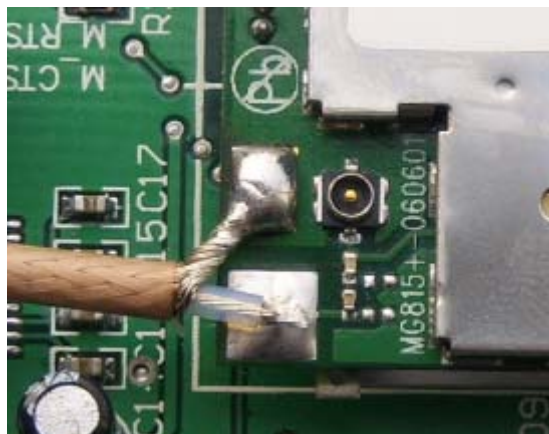

Antenna test socket is used for calibration and testing. It connects module with antenna conveniently by appropriate 50 ohm socket to SMA connecting cable. The touch impedance of this socket is so tiny, and shielding characteristics are excellent. The impedance of antenna test socket is 50 ohm, its type is MM9329-2700B, please refer to socket manual provided by supplier to choose relative plugs. This is the antenna cable interface:

Figure 4-7 RF cable interface




Proper measures should be taken to reduce the access loss of effective bands, and good shielding should be established between external antenna and RF connector. Besides, external RF cables should be kept far away from all interference sources such as high-speed digital signal or switch power supply.

According to mobile station standard, stationary wave ratio of antenna should be between 1.1 to 1.5, and input impedance is 50 ohm. Different environments may have different requirements on the antenna's gain. Generally, the larger gain in the band and smaller outside the band, the better performance the antenna has. Isolation degree among ports must more than 30dB when multi-ports antenna is used. For example, between two different polarized ports on dual-polarized antenna, two different frequency ports on dual-frequency antenna, or among four ports on dual-polarized dual-frequency antenna, isolation degree should be more than 30dB.

5 Mechanical


5.1 Appearance

Figure 5-1 module appearance of MG815+

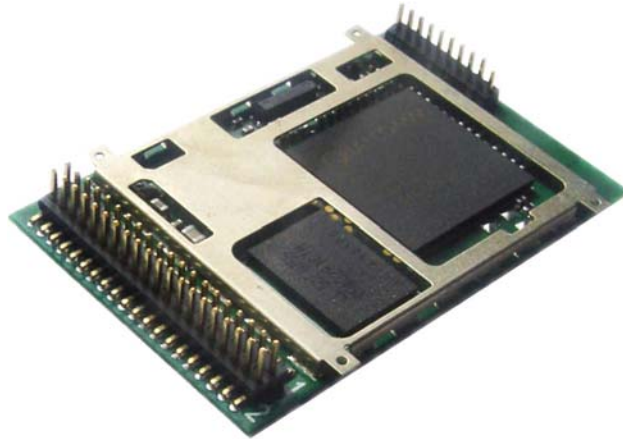

- **Dimensions:** 44.0 mm (length) x 28.0mm (width) x 7.6mm (height)
- **Weight:** 8.5g


Figure 5-2 module appearance of ME3000

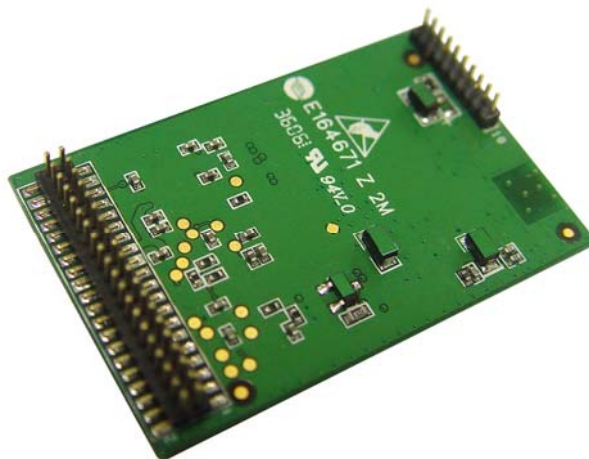

- **Dimensions:** 44.0 mm (length) x 28.0mm (width) x 7.6mm (height)
- **Weight:** 8g


5.2 Module Assembly Line

Figure 5-3 Module assembly line (bottom view)

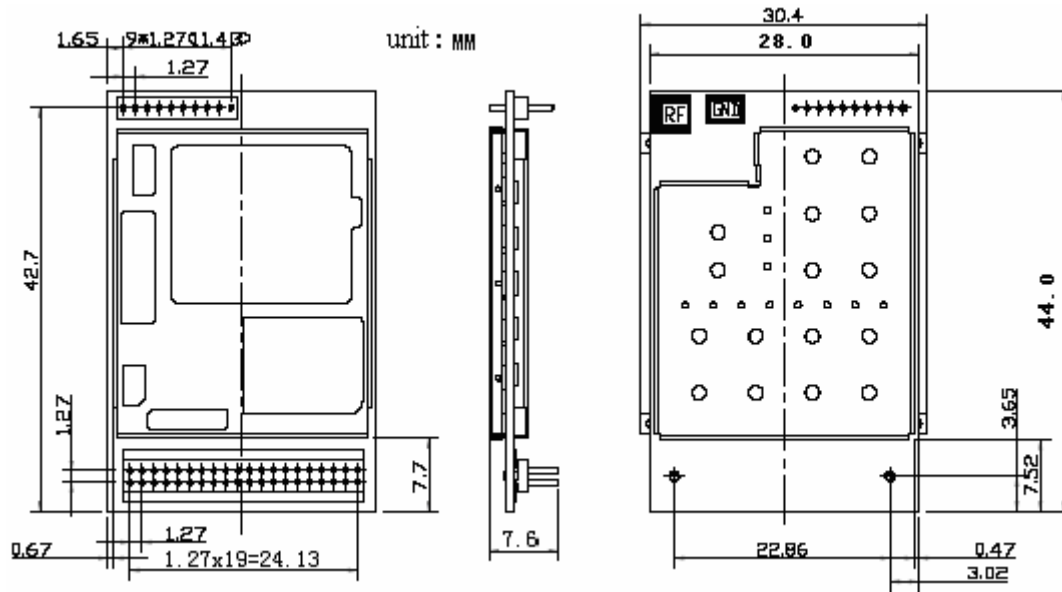

5.3 Main board PCB layout


Figure 5-4 main board PCB layout (top view)

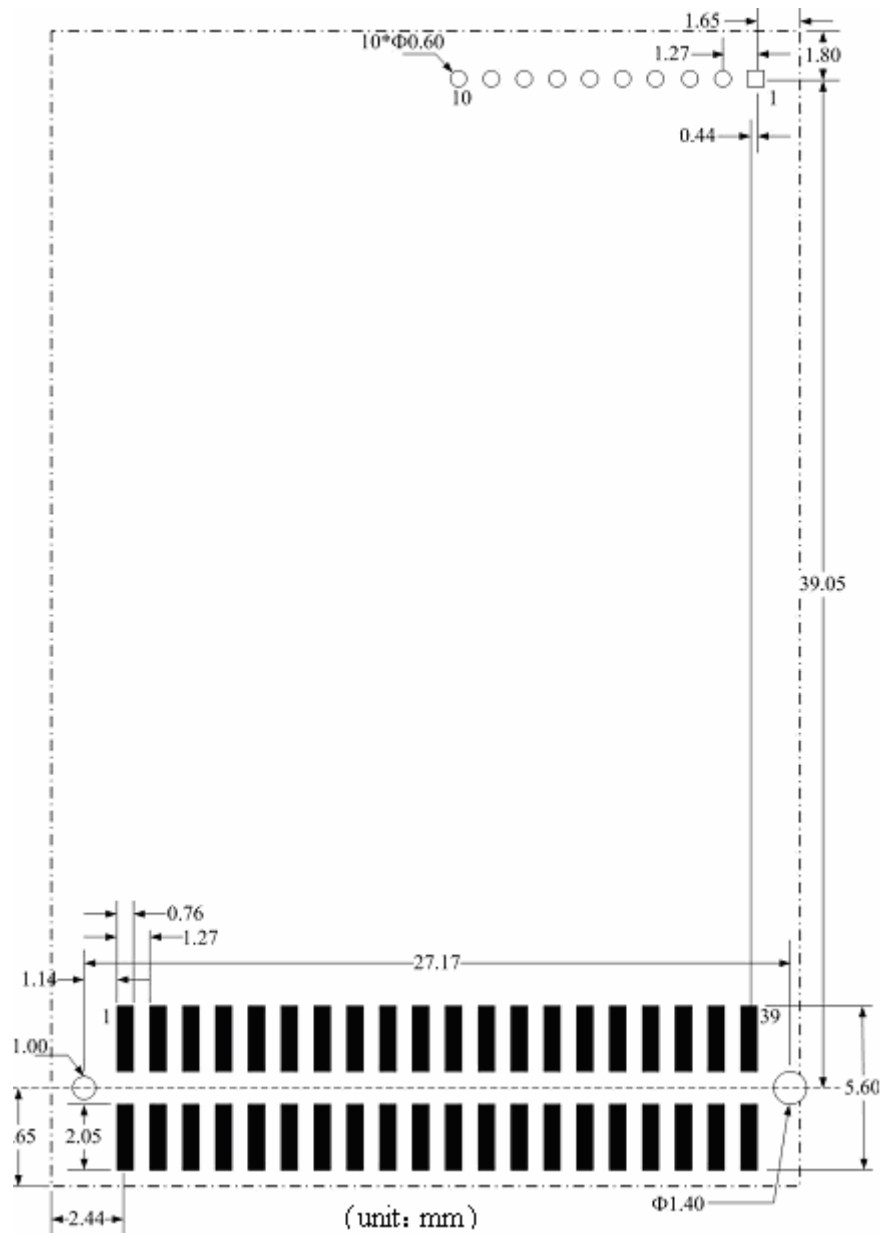

5.4 Fixing Method

The fixing metal sheet is made of stainless steel, and there are two fixing methods: jointing or inserting bolt. Refer to Fig 5-5 for product specification:

Figure 5-5 fixing method

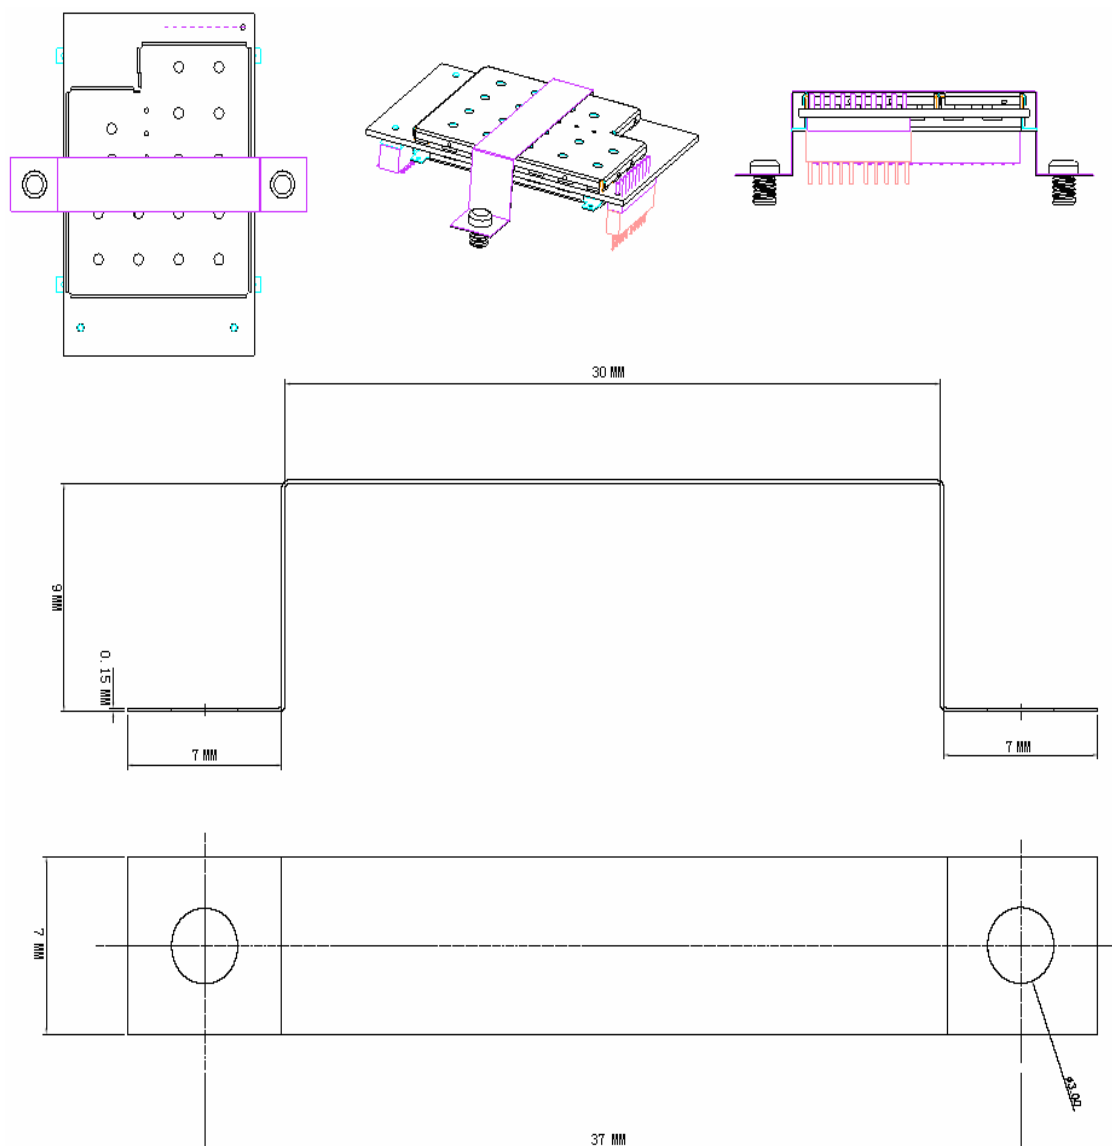

6 Peripherals components

Table 6-1 Peripherals components

Models	SN	Supplier	Website
MIC29302WU	D1	MICREL	www.micrel.com
UCLAMP0504A.TCT// NZQA5V6XV5T1G	D2	SEMTECH// ON	www.semtech.com www.onsemi.com
IDT74FCT3244Q8// PI74FCT3244Q	D3	PERICOM// IDT	www.pericom.com www.idt.com
SQPOFZ-40-S1-VB-0	X01	stwx	www.stwx.com.cn
QPOFY-10S1-VB-024	X02	stwx	www.stwx.com.cn
M-C707 10M006 097 2	X03	AMPHENOL	www.amphenol.com